



Art no.: PS0016

DIN Rail Power Supply, 36 W

Technical Features

Universal AC input 100–240 V

Accepts AC or DC input (dual-use of same terminal)

DC 24 V/1.5 A, 36 W output

Output voltage adjustable

Operating ambient temperature range -40–+70°C

High I/O isolation voltage up to 4000 VAC

Industrial-grade design

Equipment of Overvoltage Category III (EN61558-1 standards)

Low standby power consumption, high efficiency

Low ripple & noise

Short circuit, overcurrent, overvoltage protection

DIN rail TS35X7.5/ TS35X15 mountable

Withstand 300 VAC surge input for 5s

Color: Black



PS0016



4 052792 072549


Made in China

www.2direct.de



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademarks of their respective owners.

Technical Drawing

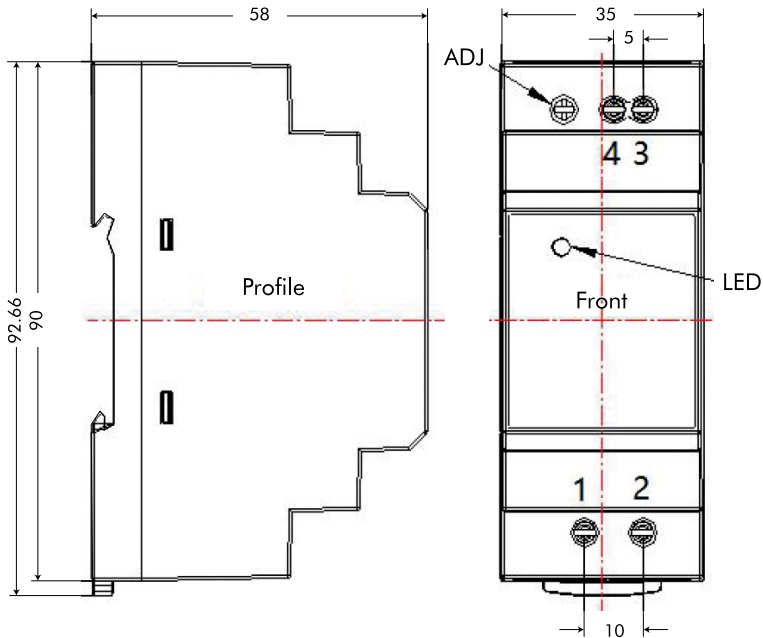

Pin-Out:

1	AC (N)
2	AC (L)
3	-Vo
4	+Vo

Note:

Unit: mm

LED: DC On

ADJ: Adjust resistance to change output voltage

Wire range: 24-12 AWG

Tightening torque: Max. 0.4 N.m

Mounting rail: TS35, rails needs to connect safety ground

General tolerances: ± 1.00

Material: Plastic (UL94V-0)

Package Contents

1x DIN Rail Power Supply

1x User Manual

Packaging Information

Packing Dimension	98 x 61 x 38 mm
Packing Weight	0.14 kg
Carton Dimension	460 x 355 x 300 mm
Carton Q'ty	70 pcs
Carton Weight	9.98 kg

PS0016



4 052792 072549

Made in China

www.2direct.de



* The specifications and pictures are subject to change without notice.
* All trade names referenced are the registered trademarks of their respective owners.